



TYPICAL PROPERTIES

Kinematic Viscosity, @ 100°C	10.2 cSt
Kinematic Viscosity, @ 40°C	55.7 cSt
Viscosity Index	175
Cold Crank Simulator, @ -35°C	5,350cP
Pour Point	-47°C
Flash Point, COC	216°C
Density, @ 15°C	0.842 g/cm ³

Values are typical of current production, and whilst future production will meet these specifications, some variation in typical data may occur.

HyperDrive KXR

0W-30 C2 Ford Fully Synthetic Engine Oil

CODE: KXEER44

HyperDrive KXR 0W-30 C2 Ford is a low viscosity fully synthetic mid SAPS engine oil produced from high-quality synthetic base oils and top-tier performance additives for use in modern Ford Duratorq TDCI diesel engines, and in other petrol and diesel engines, including hybrid engines, requiring an SAE 0W-30 oil meeting the specifications listed below. The mid SAPS formulation is compatible with exhaust after-treatment devices.

FEATURES / BENEFITS


- Mid SAPS formulation designed for use in Ford Duratorq TDCI engines, and in other petrol or diesel engines with or without exhaust after treatment devices
- Low viscosity oil improves engine efficiency, reducing running costs and emissions
- Excellent low temperature properties ensure that the oil rapidly flows throughout the engine, even at low temperatures, providing excellent protection from wear
- Top-tier performance additives deliver high levels of engine cleanliness and reduced wear
- High-quality synthetic base oils ensure long oil life and extended oil drain interval

PERFORMANCE SPECIFICATIONS

HyperDrive KXR 0W-30 C2 Ford meets the requirement of:

- ACEA: C2
- FORD: WSS M2C-950-A
- JLR: STJLR.03.5007

AVAILABILITY

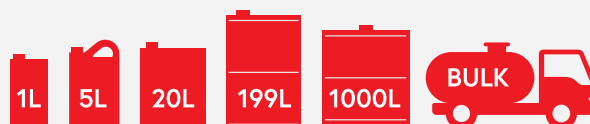

Hyperdrive, 47 Heming Road, Redditch, B98 0EA
Tel: 0800 371 910 hyperdrivelubricants.com