



HyperDrive KXS

10W-40 A3/B4

CODE: KXEEB50

HyperDrive KXS 10W-40 A3/B4 is a full SAPS semi-synthetic engine oil for use in naturally aspirated or turbocharged petrol and diesel engines without exhaust emission control systems. High quality base oils, combined with shear stable additives, provide protection from wear, rust and corrosion across a wide operating temperature, and reduce the formation of harmful deposits and sludges, maintaining engine condition and performance.

FEATURES / BENEFITS

- Semi-synthetic formulation protects against oxidation, reducing sludge and deposit formation, maintaining engine condition and performance
- Full SAPS formulation protects naturally aspirated and turbocharged petrol and diesel engines from wear, rust and corrosion, extending engine life
- Shear stable stay in grade formulation maintains viscosity across a wide range of temperatures, providing year round protection
- Low volatility formulation reduces oil consumption and maintains viscosity, ensuring suitable lubrication throughout the oil drain interval

PERFORMANCE SPECIFICATIONS


HyperDrive KXS 10W-40 A3/B4 meets the requirements of:

• ACEA: A3/B4 • API: SN • MB: 229.3 • VW: 501 01 / 505 00

HyperDrive KXS 10W-40 A3/B4 is suitable for use where the following specifications are required:

• ACEA: A3/B3 • MB: 229.1 • RENAULT: RN 0700 / 0710

AVAILABILITY

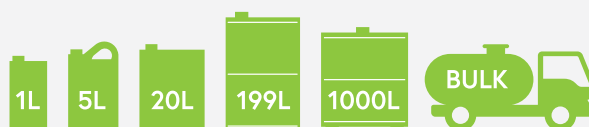

TYPICAL PROPERTIES

Kinematic Viscosity, @ 100°C	14.9 cSt
Kinematic Viscosity, @ 40°C	102.9 cSt
Viscosity Index	151
Cold Crank Simulator, @ -25°C	6,330cP
Pour Point	-39°C
Flash Point, COC	202°C
Density, @ 15°C	0.869 g/cm³

Values are typical of current production, and whilst future production will meet these specifications, some variation in typical data may occur.

Hyperdrive, 47 Heming Road, Redditch, B98 0EA
Tel: 0800 371 910 hyperdrivelubricants.com

To order call: **+44 800 371 910**

hyperdrivelubricants.com